
Steel bracelet *fitting*

BRELLUM STEEL BRACELET · REF. BO.02 · FITTING THE BRACELET TO THE WATCH CASE

A TOOLS

Supplied with the bracelet

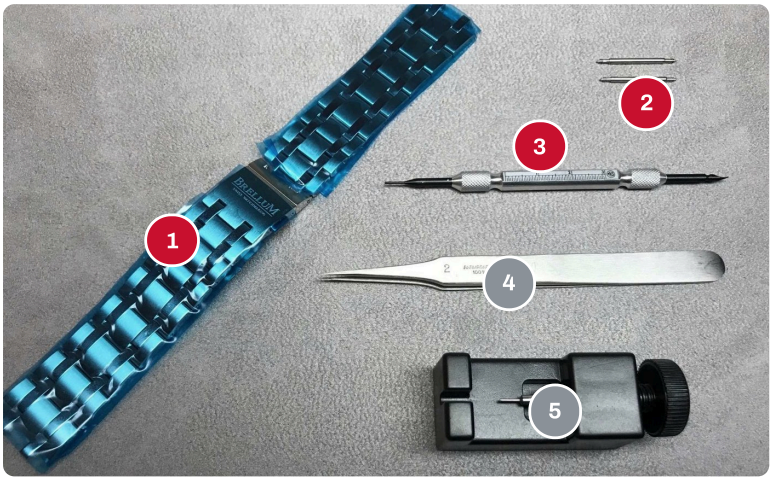

1. Bracelet, protective films in place
2. Spring bars (2)
3. Fitting tool (spring bar tool)
4. Tweezers
5. Bracelet holder

For fitting: 1, 2 and 3. The tweezers and the holder are used to adjust the length.

B BEFORE YOU START

A few precautions

- Work in good light.
- Keep the protective films on the bracelet throughout.
- Protect your work surface with a soft cloth.
- Take your time: no step needs force.
- If you cannot do it, a watchmaker will do it in a few minutes.

C PREPARATION

Spring bars and bracelet direction




1. Slide a spring bar into each end piece of the bracelet.
2. Check the direction: the end piece from which the BRELLUM name reads the right way up goes on the 6 o'clock side.

D FITTING

One side after the other



Hold the watch firmly and place the end piece between the lugs.

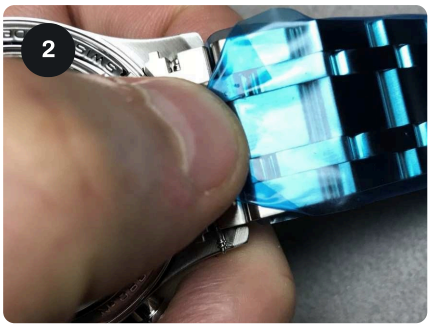

Hold the bracelet in position with your thumb.



With the fork of the tool, press one spring bar tip to engage it in the lug hole, then the other. Press the end piece lightly until it clicks: the spring bar is in place.

E CHECKING

Before fitting the second side



Correct: the end piece sits flush against the case.



Start again: there is a gap between the case and the bracelet. The spring bar is in the holes meant for a leather strap.

Pull gently on the bracelet to check it holds, then fit the other side the same way.

A question or need help? Write to us: customer@brellum.swiss